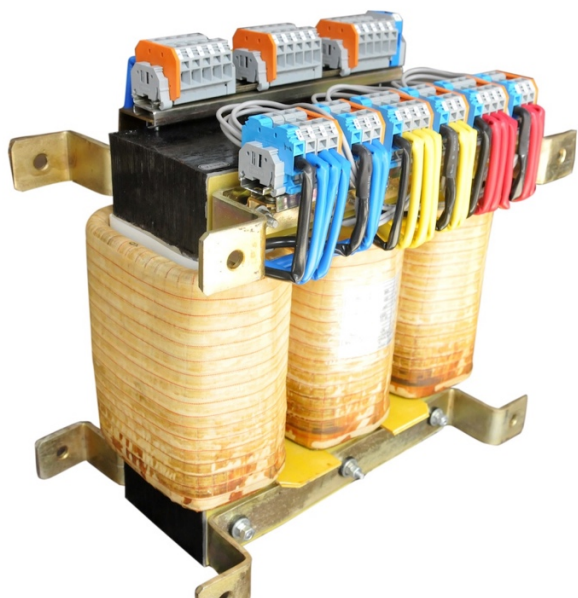


**3 Φ - Isolation / Auto Transformer****General Data**


Rated 3P Input Voltage	230 - 415 V _{A.C.} (Δ / Y)
Rated 3P Output Voltage	110 - 680 V _{A.C.} (Δ / Y)
Rated Power	12 kVA – 60 kVA
Insulation Class	Up to H Class
Max. Ambient Temperature	50° C
Efficiency up-to	92%
Degree of protection	IP00

Features

Epoxy encapsulated surface
Excellent Performance & Compact Volume
High Reliability & Low Noise due to Vacuum Pressure Impregnated (VPI) coils
Quick to cable up due to WAGO® terminals
H Class insulation for heavy duty operation
R.R. Shramik : UL approved Enamel Copper wire
Simple mounting

Application

- Power Circuit Panel
- Communication Equipment
- Medical Instruments
- VFD (Variable Frequency Drive) Application

Standards**EN 61558-1:2005****EN 61558-2-2:2007****EN 61558-2-20:2010**

Safety of Power Transformers & Reactors

IS 12021:2015

Control Transformers for Switchgear

IEC 60947-2:2005

Low-voltage switchgear and control gear

Certifications

2014/35/EU – Low Voltage Directive