




1Φ - Isolating Transformer

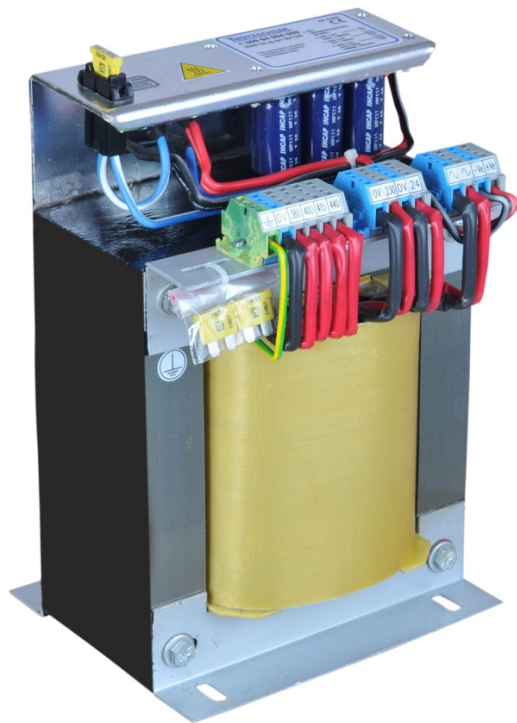

General Data

Rated Input Voltage	230 - 415 V _{A.C.}
Rated Output Voltage	24 - 230 V _{A.C.} 24 - 48 V _{D.C.}
Rated Power	60 - 8000 VA
Insulation Class	Up to H Class
Max. Ambient Temperature	50° C
Efficiency up-to	95%
Degree of protection	IP00


Features

Epoxy encapsulated surface
Excellent Performance & Compact Volume
High Reliability & Low Noise due to Vacuum Pressure Impregnated (VPI) coils
Quick to cable up due to WAGO® terminals
H Class insulation for heavy duty operation
R.R. Shramik : UL approved Enamel Copper wire
Simple mounting

Application

- Protective Separation
- Power Line Noise & Surges elimination
- Control Circuit Panel
- PELV & SELV Circuit (Extra Low Voltage)

Standards



EN 61558-1:2005

EN 61558-2-2:2007

EN 61558-2-20:2010

Safety of Power Transformers & Reactors

IS 12021:2015

Control Transformers for Switchgear

IEC 60947-2:2005

Low-voltage switchgear and control gear

Certifications



2014/35/EU – Low Voltage Directive